

WINCO[®]

INCORPORATED

9,500MaxWatts
8,500ContinuousWatts

FullWrapAround1"
TubularSteelCradle

DuPontIndustrial
PowderCoatedPaint

HondaGX610
610ccOHV
LowOilProtection
ElectricStart(batterynotincluded)

RubberIsolationMounts
ForEngineandGenerator

Brushless100%
CopperWindings
ClassFInsulation

300lbsDryWeight

4.5GallonFuelTank

Four20amp120Volt
StraightBladeReceptacles
GFCIProtected

50amp240Volt
StraightBladeReceptacle


50amp120Volt
StraightBladeReceptacle

20amp240Volt
TwistLockReceptacle

30amp120/240Volt
TwistLockReceptacle

Two20ampTwistLock
120VoltGFCIProtected

AllReceptaclesare
CircuitBreakerProtected

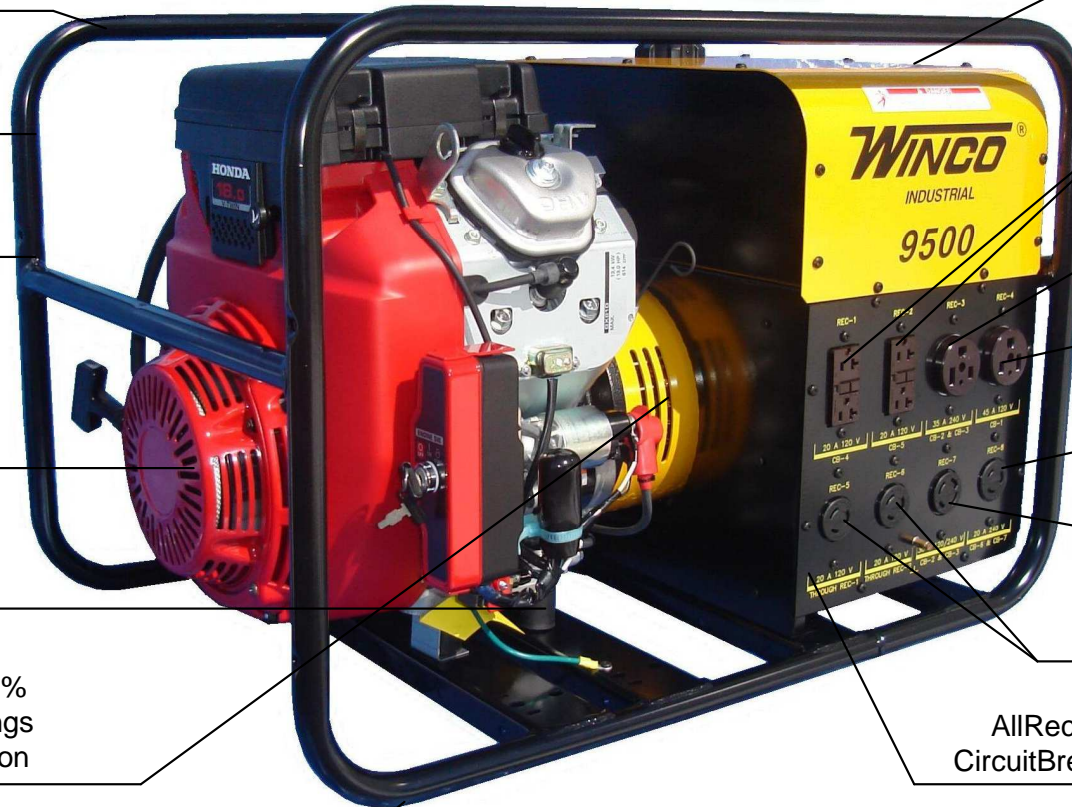

Industrial Series

W9500HE